



NC 075




NC 072



NC 074




NC 029



NC 046




NC 050




NC 012




NC 069




NC 049




NC 067




NC 078




NC 077



NC 076

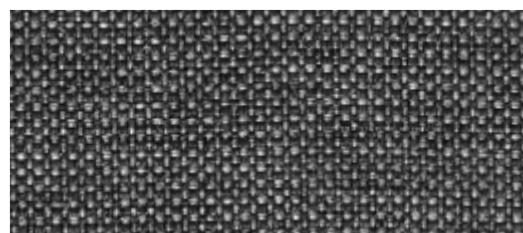

NC 550

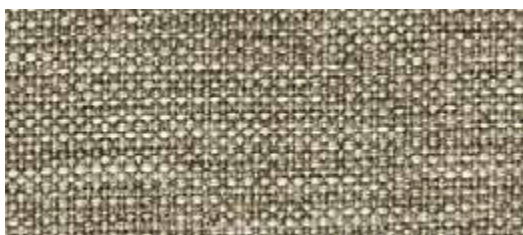

NC 549



NC 546

**PL****Skład**

100% poliester

**Waga**

366 g/m<sup>2</sup> ± 15 g

**Szerokość rolki**

140 cm

**Odporność na ścieranie**

140,000 ± 5% cykli Martindale  
(PN-EN 14465: 2005/ A1:2007)

**Pilling**

4-5 (UNI EN ISO 12945/2)

**Odporność na światło**

3-4 (PN - EN ISO 105-B02: 2013)

**Odporność koloru na tarcie**

Mokro: 4-5 (PN-EN ISO 105 X12:2005)  
Sucho: 4-5 (PN-EN ISO 105 X12:2005)

**Certyfikaty trudnopalności**

-PN-EN 1021-1: 2007  
-PN-EN 1021-2: 2007

**DE****Zusammensetzung**

100% Polyester

**Gewicht**

366 g/m<sup>2</sup> ± 15 g

**Rollenbreite**

140 cm

**Scheuerfestigkeit**

140,000 ± 5% Zyklen Martindale  
(PN-EN 14465: 2005/ A1:2007)

**Pilling**

4-5 (UNI EN ISO 12945/2)

**Lichtechtheit**

3-4 (PN - EN ISO 105-B02: 2013)

**Reibechtheit**

Nass: 4-5 (PN-EN ISO 105 X12:2005)  
Trocken: 4-5 (PN-EN ISO 105 X12:2005)

**Feuersicherung**

-PN-EN 1021-1: 2007  
-PN-EN 1021-2: 2007

**EN****Composition**

100% polyester

**Weight**

366 g/m<sup>2</sup> ± 15 g

**Roll width**

140 cm

**Abrasion Resistance**

140,000 ± 5% Martindale cycles  
(PN-EN 14465: 2005/ A1:2007)

**Pilling**

4-5 (UNI EN ISO 12945/2)

**Light Fastness**

3-4 (PN - EN ISO 105-B02: 2013)

**Fastness to Rubbing**

Wet: 4-5 (PN-EN ISO 105 X12:2005)  
Dry: 4-5 (PN-EN ISO 105 X12:2005)

**Flammability**

-PN-EN 1021-1: 2007  
-PN-EN 1021-2: 2007

